



## Gas sensor KSEA 637

for detection of Sulfur Dioxide SO<sub>2</sub>



### Features

- The gas detector measures the selected gas concentration
- linearized and temperature-compensated 4-20 mA output signal
- 16...30 VDC supply voltage (2-wire or 3-wire cable)
- various gas sensor technologies available (electrochemical, Infrared, pellistor, semiconductor)
- factory calibration with calibration certificate to the specified measuring range
- Zero & Span potentiometers and calibration jack socket accessible from outside without opening the gas detector enclosure
- water- and dust-proof IP 65 enclosure
- rust-proof and acid-resistant steel enclosure
- Swiss-Made


**Gas sensor KSEA 637**

Gas:	Sulfur Dioxide
Gas formula:	SO <sub>2</sub>
Warranty:	12 month warranty
Position:	30 cm from Floor

**Sensor specifications**

Measurement principle:	Electrochemical
Measuring range:	0...100 ppm
Standard calibration:	0...10/50/100 ppm
Response time t 90:	< 15 sec
Operating temperature:	-20 °C ... +45 °C
Start up after reconditioning:	approx. 1 hour
Pressure range:	atmospheric ± 10%
Air humidity:	15...90% R.H. non-condensing
Position sensitivity:	none
Long term output drift:	< 2% signal loss/month
Life span at 20 °C:	2 years, depending on the application

**Electronic and Dimensions**

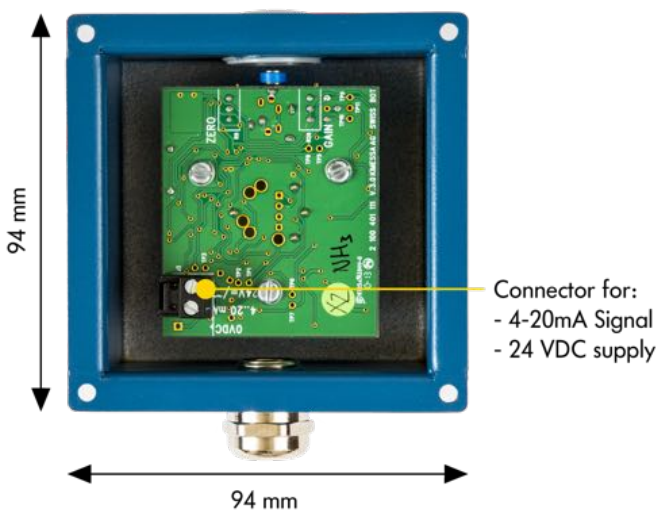

**Housing**

Housing protection:	IP 65
Material:	rust-proof and acid-resistant
Weight:	410 g

**Specifications electronic**

Wiring analogue:	2x 0,75 mm <sup>2</sup> , shielded
Supply:	13.5...30 VDC
Power consumption:	max. 60 mA
Output signal analogue:	4...20 mA
Switching output:	no

**Specifications construction**

Cable gland:	1x M16
Cable entry:	bottom
Tests:	CE
Display:	no
Position:	position independent

**Inspection (Maintenance)**

The sensor and the electronic require an inspection. Routine calibration is recommended once or twice a year.

